




PRODUCT DESCRIPTION

One or two lights beams outdoor wall or ceiling cylindrical section luminaire available in different sizes. It is constructed of:

NOTES
Mono direction light

- Extruded and die-casted aluminium body
- Tempered glass diffuser
- Aluminium reflector
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders

DIMENSIONS

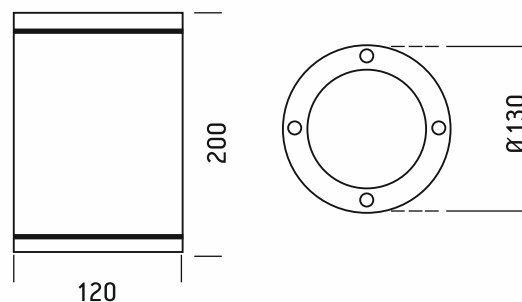


Order Code	Lampholder	Colours
ALFA / W	LED	White
ALFA / B	LED	Black
ALFA / S	LED	Silver


TECHNICAL DATA

Housing: Aluminium
IP rate: IP55
Watts: 15W


Voltage: 220-240V / 50-60Hz
Beam angle: 40° or 60°
CT: 3000K or 4000K



Ceiling mounting



Single power supply entry cables



Impact Energy (J):
2