

FLUSH MOUNTED CEILING LUMINARY

IONIAN DAMPA



Application Area

- Recessed luminary for cabins, passenger facilities, corridors, wheelhouses where DAMPA ceilings DCC300 are used.

Design

- According to the rules of international classification societies, VDE and IEC

Housing

- Zinc coated steel, powder coated RAL9010
- Diffuser made of acrylic

Mounting

- Brackets for modular carrier No.16

Lamps

- LED Module

Electric

- 230V 50-60Hz, Flexible cable, heat resistant up to 105°C

Cable entry


- Four cable inlets 20mm

Protection

- IP22

Options

- IP44 model
- Opal diffuser
- Emergency battery kit
- Emergency E14 lampholder

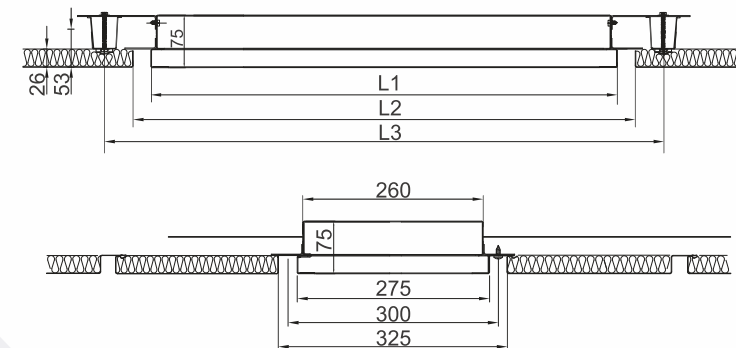

Order Codes

CODE	WATTAGE	VOLTAGE	FREQUENCY	L1	L2	L3
IONIAN D LED-56	18W	220-240V	50-60Hz	655	705	800
IONIAN D LED-112	38W	220-240V	50-60Hz	1250	1300	1400

