

RECESSED FLUORESCENT LUMINARY

IONIAN



Application Area

- Recessed, cabins, corridors, lounges, dinning rooms, accomodation areas

Design

- According to the rules of international classification societies, VDE and IEC

Housing

- Zinc coated steel. powder coated RAL9010
- Diffuser made of opal acrylic

Mounting

- Four Mounting Brackets

Lamps

- 18/36 Watt T8

Electric

- 230V 50 or 60Hz, Flexible cable, heat resistant up to 105°C

Cable entry


- Two cable inlets 20mm

Protection

- IP20

Options

- IP44 model
- Transparent diffuser
- Emergency battery kit
- Emergency E14 lampholder

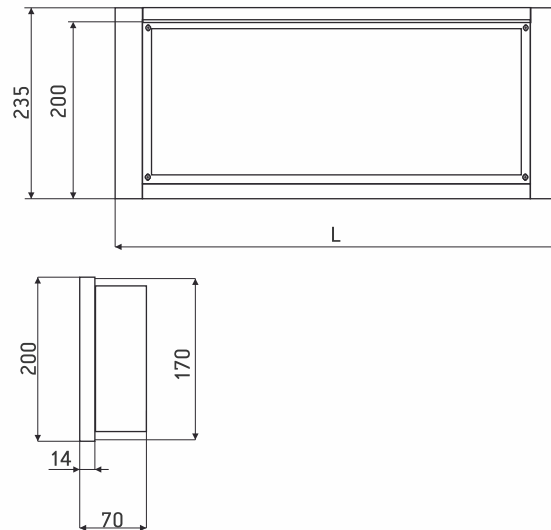

Order Codes

CODE	WATTAGE	VOLTAGE	FREQUENCY	L
IONIAN LED-56	18W	220-240V	50-60Hz	645
IONIAN LED-112	38W	220-240V	50-60Hz	1250

