

SURFACE MOUNTED CEILING LUMINARY

PRISMA



Application Area

- Surface luminaire for cabins, passenger facilities, corridors, wheelhouses.

Design

- According to the rules of international classification societies, VDE and IEC

Housing

- Zinc coated steel, powder coated RAL9010
- Diffuser made of opal acrylic

Mounting

- Four mounting holes 5.5 mm

Lamps

- LED Module

Electric

- 230V 50 or 60Hz,
Flexible cable, heat resistant up to 105°C

Cable entry


- Two cable inlets 20mm

Protection

- IP22

Options

- Transparent diffuser
- Emergency E14 lampholder

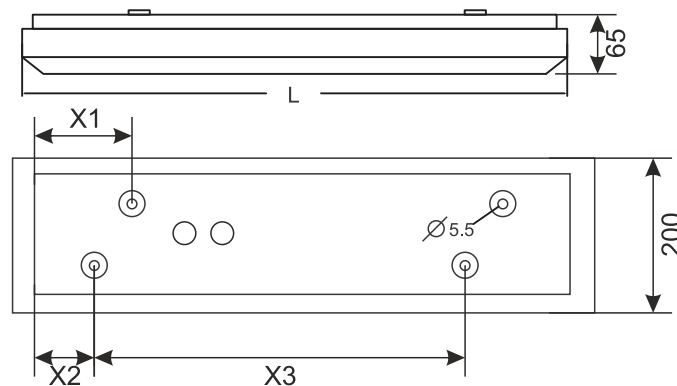

Order Codes

CODE	VOLTAGE	FREQUENCY	L	X1	X2	X3	LAMP
PRISMA LED-56	220-240V	50-60Hz	670	157	107	382	18W T8
PRISMA LED-112	220-240V	50-60Hz	1270	225	170	860	36W T8