



Application Area

- Self testing emergency sign luminary with LEDs for use to the indoor spaces of the vessel.

Housing

- Aluminum
- Diffuser made of clear plexiglass

Design

- According to the rules of international classification societies, VDE and IEC

Mounting

- Wall or ceiling installation
- Flush mounted base available

Lamps


- LED module

Electric

- 230V 50-60Hz,
Flexible cable, heat resistant up to 105°C

Protection

- IP40

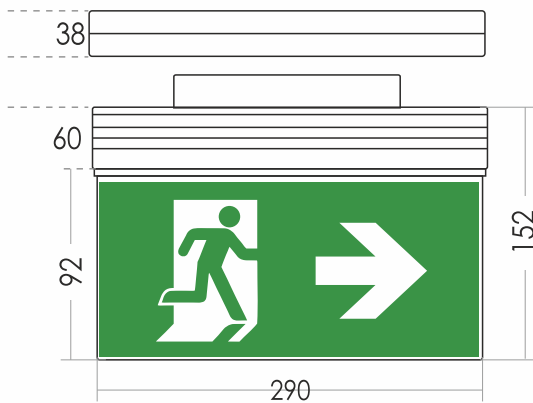

Operation Voltage	220-240V AC/ 50-60Hz
Maximum Power consumption	3,8W/6,7VA
Battery (Ni-Cd)	3,6V/ 1,5Ah
Battery protection	From overcharge and full discharge
Indications - Controls	Charge, LED fault, Indication LED, Test button
Charging Time	24H
Minimum autonomous duration	180 min
Illumination (230V/ Emergency)	125/125 lm
Degrees of cover protection	IP40