


SURFACE - LOW PROFILE LED LIGHT

SQ 115

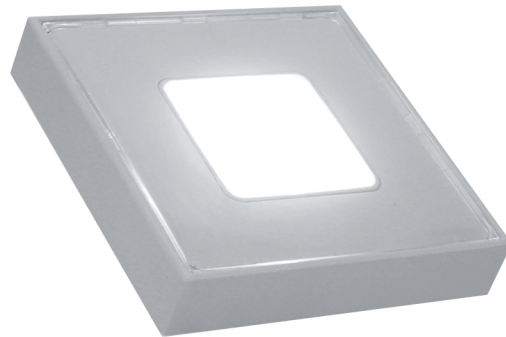


PRODUCT DESCRIPTION

High performance ceiling LED light. The geometrical figure of the square guarantees extremely reduced dimensions and an innovative and particular "thinness".

Direct connection to main voltage 230V without driver.

DIMENSIONS

Code	Voltage	Frequency	Power	CCT	CRI
SQ 115-3	220-240V	50-60 Hz	6W	3000K	>80
SQ 115-4	220-240V	50-60 Hz	6W	4000K	>80
SQ 115-3-10	220-240V	50-60 Hz	10W	3000K	>80
SQ 115-3-10	220-240V	50-60 Hz	10W	4000K	>80

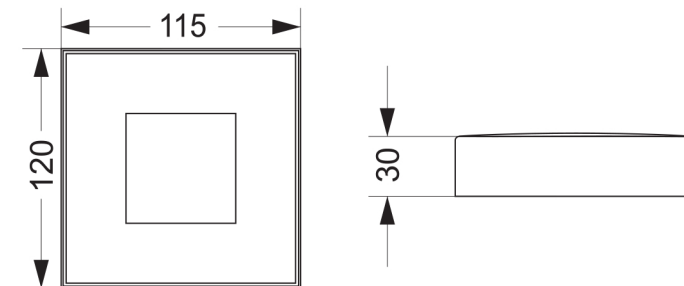

TECHNICAL DATA

Housing
• Aluminum

IP Rate
• IP44

Optional
• Dimmable
and RAL selection

